
Data flow for Userlane JavaScript Snippet implementation

Last Modified on 05.07.2023

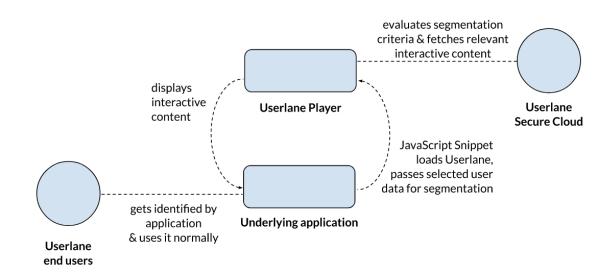

Recorded data field	Purpose
Userlane Property ID	To identify which app Userlane is loaded upon and
(one per app)	fetch relevant content.
URL	To identify which app Userlane is loaded upon and
	fetch relevant content.
URL patterns	To have the browser extension detect whether
	Userlane should be loaded.
User ID	To identify the same user again and show the progress of completed Guides. If no User ID is passed into the JavaScript Snippet, Userlane automatically creates one and stores it in a cookie. This can be an anonymous identifier that does not qualify as personal data.
User Data (optional)	To segment users depending on groups/tags or attributes. If no User Data is passed into the JavaScript Snippet, Userlane works with empty/anonymous user profiles. Never is such data automatically collected. It always needs to be actively passed into the JavaScript Snippet.
Browser	To guarantee browser compatibility.